
DRAGON
WINCH
NR 1
IN EUROPE
WINCHES FOR:
special trucks,
industrial vehicles,
off-road vehicles,
ATV/UTV
www.dragonwinch.us
2026



BORN IN POLAND
BUILT FOR
THE TOUGHEST

Welcome to DRAGON WINCH, where European engineering meets resolute durability. As Poland's largest winch manufacturer with a global presence, we have spent more than 30 years developing reliable equipment for the most demanding applications.

Trusted in 51 countries, DRAGON WINCH is now bringing its proven quality and pulling power to the United States.

EXTREME QUALITY

51 AVAILABLE IN 51 COUNTRIES

OWN RESEARCH AND DEVELOPMENT

INNOVATIVE SOLUTIONS

DRAGON WINCH TRUCK

THE DRAGON WINCH TRUCK SERIES COMPRISES EXTRA STRONG AND SOLID WINCHES INTENDED FOR USE IN THE MOST EXTREME CONDITIONS. DEDICATED FOR:



special vehicles



industrial vehicles

DRAGON WINCH
series TRUCK



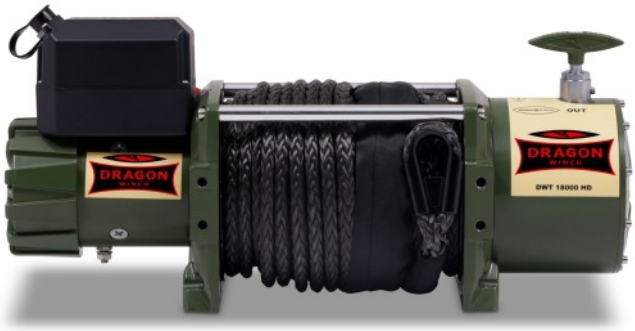

DWT 22000 HD

Dedicated for: special trucks,
tow trucks / industrial vehicles
Voltage: 24 V DC
Motor: 9,5 hp
Pulling rate: 22,000 lbs / 9979 kg
Reduction ratio: 463:1
Gear train: 3 stage planetary
Brake: dynamic
Length of the synthetic rope: 827" (21 m)
Overall product dimensions (LxWxH):
25.1" x 8.5" x 10.7" (637 mm x 217 mm x 271 mm)
Weight: 143 lbs. (67 kg)
Mounting screws (pcs): 8
Mounting bolt patern: 10" x 4.5" / 10" x 6.5"
(254 mm x 114 mm / 254 mm x 164 mm)

THE SET INCLUDES:
- synthetic rope
- hook
- control box
- aluminum fairlead
- remote control
and wireless remote control
- mounting screws

Cable winding speed and power consumption (the first cable layer on the drum)

cable load	lbs.		6,000	12,000	22,000
	(kg)		(2721)	(5443)	(9979)
cable speed	ft./min	14.8	12.1	9.8	5.6
	(m/min)	(4,5)	(3,7)	(3,0)	(1,7)
power consumption 24 V	amps	42	112	232	305

Pulling force depending on cable layer

cable layer		1	2	3	4	5
cable pull	lbs.	22,000	17,380	14,960	12,980	10,780
	(kg)	(9979)	(7883)	(6786)	(5887)	(4889)
cable lenght on the drum	in.	201"	437"	724"	1,043"	1,181"
	(m.)	(5,1)	(11,1)	(18,4)	(26,5)	(30,0)

DWT 18000 HD

Dedicated for: off-road vehicles,
tow trucks / industrial vehicles
Voltage: 24 V DC
Motor: 9,0 hp
Pulling rate: 18,000 lbs / 8165 kg
Gear train: 3 stage planetary
Reduction ratio: 358:1
Brake: dynamic
Length of the synthetic rope: 827" (21 m.)
Overall product dimensions (LxWxH):
23.1" x 7.7" x 10.4" (586 mm x 196 mm x 265 mm)
Weight: 110 lbs. (50 kg)
Mounting screws (pcs): 4
Mounting bolt patern: 10" x 4.5"
(254 mm x 114 mm)

THE SET INCLUDES:
- steel cable or synthetic rope
- hook
- control box
- aluminum fairlead
- remote control
and wireless remote control
- mounting screws

Cable winding speed and power consumption (the first cable layer on the drum)

cable load	lbs.		6,000	12,000	18,000
	(kg)		(2721)	(5443)	(8165)
cable speed	ft./min	18.0	13.5	10.2	4.9
	(m/min)	(5,5)	(4,1)	(3,1)	(1,5)
power consumption 24 V	amps	39	105	214	280

Pulling force depending on cable layer

cable layer		1	2	3	4	5
cable pull	lbs.	18,000	14,200	12,240	10,620	8,820
	(kg)	(8165)	(6450)	(5552)	(4817)	(4001)
cable lenght on the drum	in.	205"	449"	748"	1,094"	1,181"
	(m)	(5,2)	(11,4)	(19,0)	(27,8)	(30,0)

DRAGON WINCH

DRAGON WINCH MAVERICK

THE DRAGON WINCH MAVERICK SERIES COMPRISES PROVEN AND TOUGH WINCHES INTENDED FOR MANY DIFFERENT KINDS OF USE. DEDICATED FOR



special vehicles



medium and small off-road vehicles



car transporters



ATV



ploughs

DRAGON WINCH
series MAVERICK

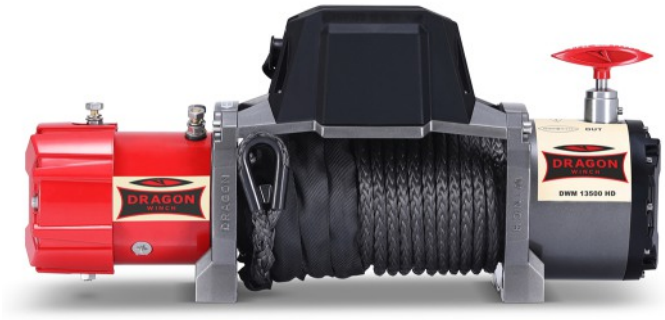



DWM 13500 HD

Dedicated for: off-road vehicles, tow trucks/ industrial vehicles
Voltage: 12 V DC
Motor: 6,8 hp
Pulling rate: 13500 lb / 6123 kg
Gear train: 3 stage planetary
Reduction ratio: 265:1
Brake: dynamic
Length of the synthetic rope: 787" (20 m)
Overall product dimensions (LxWxH):
21.5" x 6.5" x 9.6" (546 mm x 166 mm x 244mm)
Weight: 71 lbs. (32 kg)
Mounting screws (pcs): 4
Mounting bolt patern: 10" x 4.5" (254 mm x 114 mm)

THE SET INCLUDES:
- synthetic rope
- hook
- control box
- aluminum fairlead
- remote control and wireless remote control
- mounting screws

Cable winding speed and power consumption (the first cable layer on the drum)

cable load		lbs.		4,000	8,000	13,500
		(kg)		(1814)	(3629)	(6123)
cable speed		ft./min	19.4	14.4	9.2	2.5
		m/min	(5,9)	(4,4)	(2,8)	(0,75)
power consumption 12 V		amps	58	158	314	458
power consumption 24 V		amps	35	89	178	252

Pulling force depending on cable layer

cable layer		1	2	3	4	5
cable pull	lbs.	13,500	10,670	9,180	7,930	6,620
	(kg)	(6123)	(4838)	(4164)	(3597)	(3001)
cable lenght	in.	193"	433"	701"	1,024"	1,181"
on the drum	(m.)	(4,9)	(11,0)	(17,8)	(26,0)	(30,0)

DWM 13000 HD

Dedicated for: off-road vehicles, tow trucks/ industrial vehicles
Voltage: 12 V DC
Motor: 6,8 hp
Pulling rate: 13500 lb / 6123 kg
Gear train: 3 stage planetary
Reduction ratio: 265:1
Brake: dynamic
Length of the synthetic rope: 787" (20 m)
Overall product dimensions (LxWxH):
21.5" x 6.5" x 9.6" (546 mm x 166 mm x 244mm)
Weight: 66 lbs. (30 kg)
Mounting screws (pcs): 4
Mounting bolt patern: 10" x 4.5" (254 mm x 114 mm)

THE SET INCLUDES:
- synthetic rope
- hook
- control box
- aluminum fairlead
- remote control and wireless remote control
- mounting screws

Cable winding speed and power consumption (the first cable layer on the drum)

cable load		lbs.		4,000	8,000	13,000
		(kg)		(1814)	(3629)	(5897)
cable speed		ft./min	19.4	14.4	9.2	2.6
		m/min	(5,9)	(4,4)	(2,8)	(0,8)
power consumption 12 V		amps	58	158	314	448
power consumption 24 V		amps	35	89	178	245

Pulling force depending on cable layer

cable layer		1	2	3	4	5
cable pull	lbs.	13,000	10,270	8,840	7,630	6,370
	(kg)	(5897)	(4658)	(4009)	(3463)	(2889)
cable lenght	in.	193"	433"	701"	1,024"	1,181"
on the drum	(m.)	(4,9)	(11,0)	(17,8)	(26,0)	(30,0)

DRAGON WINCH
series MAVERICK



DWM 10000 HD

Dedicated for: off-road vehicles,
tow trucks/ industrial vehicles
Voltage: 12 V DC
Motor: 6,8 hp
Pulling rate: 10 000 lb / 4536 kg
Gear train: 3 stage planetary
Reduction ratio: 265:1
Brake: dynamic
Length of the synthetic rope: 984" (25 m)
Overall product dimensions (LxWxH):
17.7" x 6.2" x 8.9" (450 mm x 153 mm x 228mm)
Weight: 60 lbs. (27 kg)
Mounting screws (pcs): 4
Mounting bolt patern: 6.5" x 4.5" (164 mm x 114 mm)

THE SET INCLUDES:
- synthetic rope
- hook
- control box
- aluminum fairlead
- remote control
and wireless remote control
- mounting screw

Cable winding speed and power consumption (the first cable layer on the drum)

cable load	lbs.		4,000	10,000
	(kg)		(1814)	(4536)
cable speed	ft./min	19.4	11.8	4.3
	(m/min)	(5,9)	(3,6)	(1,3)
power consumption 12 V	amps	50	180	390

Pulling force depending on cable layer

cable layer		1	2	3	4	5
cable pull	lbs.	10,000	7,900	6,800	5,900	5,000
	(kg)	(4536)	(3583)	(3084)	(2676)	(2270)
cable lenght	in.	142"	307"	488"	701"	945"
on the drum	(m.)	(3,6)	(7,8)	(12,4)	(17,8)	(24,0)





DRAGON WINCH
HIGHLANDER

THE DRAGON WINCH HIGHLANDER SERIES IS THE BEST OPTION IN EXTREME OPERATING CONDITIONS.
DEDICATED FOR:

extreme ATV

UTV

DRAGON WINCH
series HIGLANDER



DWH 4500 HD

Dedicated for: ATV/UTV
Voltage: 12 V DC
Motor: 1,9 hp
Pulling rate: 4500 lb / 2041 kg
Gear train: 3 stage planetary
Reduction ratio: 138:1
Brake: automatic
Length of the synthetic rope: 591" (15 m)
Overall product dimensions (LxWxH):
13.4" x 4.5" x 4.5" (340 mm x 114 mm x 115 mm)
Weight: 27 lbs. (12 kg)
Mounting screws (pcs): 4
Mounting bolt patern: 4.9" x 3.0" (124 mm x 76 mm)

THE SET INCLUDES:
- synthetic rope
- hook
- control box
- aluminum fairlead
- remote control
and wireless remote control
- mounting screws
- universal mounting plate

Cable winding speed and power consumption (the first cable layer on the drum)

cable load	lbs.		1,000	2,000	4,500
	(kg)		(453)	(907)	(2041)
cable speed	ft./min	20.7	17.4	14.8	6.9
	(m/min)	(6,3)	(5,3)	(4,5)	(2,1)
power consumption 12 V	amps	23	40	81	160

Pulling force depending on cable layer

cable layer		1	2	3	4	5
cable pull	lbs.	4,500	3,550	3,060	2,650	2,200
	(kg)	(2041)	(1612)	(1388)	(1204)	(1001)
cable lenght on the drum	in.	91"	193"	315"	449"	591"
	(m.)	(2,3)	(4,9)	(8,0)	(11,4)	(15,0)



DWH 3500HD

Dedicated for: ATV/UTV
Voltage: 12 V DC
Motor: 1,6 hp
Pulling rate: 3500 lb / 1588 kg
Gear train: 3 stage planetary
Reduction ratio: 138:1
Brake: automatc
Length of the synthetic rope: 591" (15 m)
Overall product dimensions (LxWxH):
13.9" x 4.5" x 4.5" (354 mm x 114 mm x 115 mm)
Weigh: 24 lbs. (11 kg)
Mounting screws (pcs): 4
Mounting bolt patern: 4.9" x 3.0" (124 mm x 76 mm)

THE SET INCLUDES:
- synthetic rope
- hook
- control box
- aluminum fairlead
- remote control
and wireless remote control
- mounting screws
- universal mounting plate

Cable winding speed and power consumption (the first cable layer on the drum)

cable load	lbs.		1,000	2,000	3,500
	(kg)		(453)	(907)	(1587)
cable speed	ft./min	17.7	15.7	13.1	9.8
	(m/min)	(5,4)	(4,8)	(4,0)	(3,0)
power consumption 12 V	amps	19	49	96	150

Pulling force depending on cable layer

cable layer		1	2	3	4	5
	lbs.	3,500	2,760	2,380	2,130	1,720
cable pull	(kg)	(1587)	(1254)	(1079)	(967)	(778)
	in.	98"	209"	331"	480"	591"
cable lenght on the drum	(m.)	(2,5)	(5,3)	(8,4)	(12,2)	(15,0)



www.dragonwinch.us